

Take Down

- 1 Remove the advertising banner(s) and other materials from outside and inside the bar.
- 2 Turn the bar upside down.
- 3 At each of the six bottom brackets you will find a release button. Press each button and remove each leg.
- 4 When all legs are removed compress the material back towards the countertop. You can compress your portable bar with the shelves still in place. You are ready to place the bar back into it's travel bag with the rest of the bar's components.


Maintenance

Storage

Make sure the AdCooler portable cooler bar is completely dry before storing. **DO NOT STORE WET OR DAMP.** Storing the bar wet or damp will cause odors and mildew.

Cleaning

If necessary, gentle cleaning can be done with a mild liquid soap and a clean cloth or sponge. **DO NOT SCRUB FABRIC.** Take special care when cleaning graphic areas.

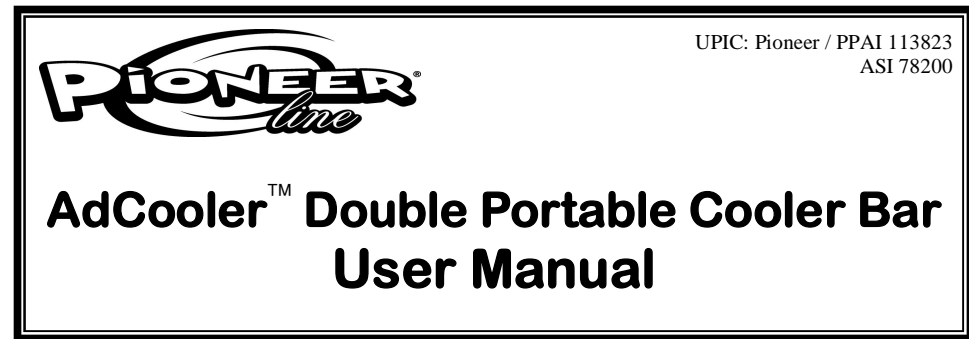

AdCooler Double Portable Cooler Bars are packaged in one, easy-to-handle, portable case convenient for storage. Each comes complete with an attached, hard counter; four corner legs (feet slightly angled for stability), one straight leg and one short straight leg, one leg end cap; and two shelves. Most AdCooler portable bars come complete with an attachable wrap-around advertising banner.

Each double portable cooler bar comes partially assembled with ready to use water tight cooler compartments with zippers and drain system.

Product Description

Materials


AdCooler portable bars are crafted using high-quality fabric. Graphics on the wrap-around advertising banners are created with silk-screen printing up to four-color process printing.

The frame is made of a powder coated steel and is very sturdy. The counter is made of a hard laminate.



Set Up

- 1 Turn the bar upside down so it is resting on the countertop surface. Be sure it is on a smooth, clean surface so the counter does not get scratched or dirty.

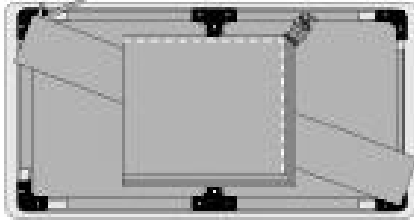


- 2 Pull material up toward you so that the it is partially straightened.


- 3 Insert each corner leg through the bottom bracket hole, through the material channel and into the bracket hole under the countertop. Repeat this step so that all four corner legs are inserted. (Make sure the foot angles are facing outward from the bar).

- 4 Insert the long straight leg into the back of the bar. (See pg. 1 for a back view of the bar).

- 5 Pull the corner brackets (attached to the material) up towards you until the ball bearing clicks into place. Secure the long straight leg by pulling up on the bracket until the ball bearing clicks into place.

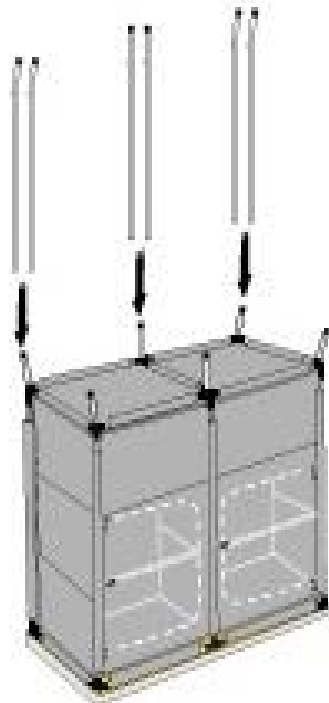

- 6 Insert the short leg into the bottom, front, center bracket until the ball bearing clicks into place and position the leg end cap on top of the bracket's hole.
- 7 Turn the bar right side up.
- 8 Position the two shelves in place from the back of the bar. Simply lay them on top of the material shelves already in place.

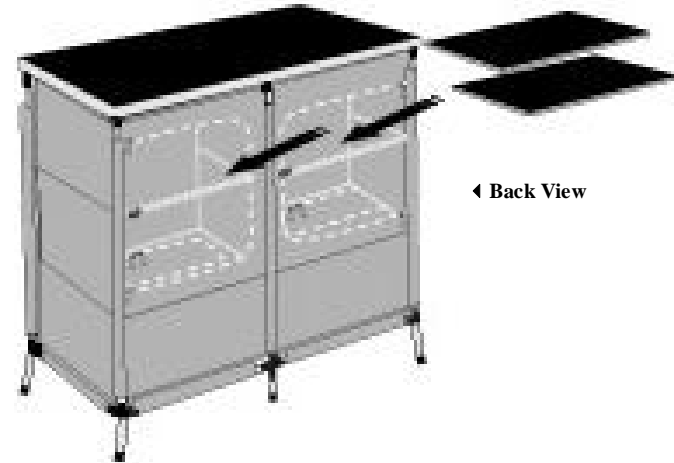

- 9 If you are using the wrap-around advertising banner, align the velcro on the banner to the top brackets wrapped with velcro. Your banner will have two clips located at the top left-and right-side. Attach these clips to the loops found at the left-and right-corners on top and bottom at the back of the bar.

